

Product Specification

25G SFP28 10km CWDM EML Transceivers

MT-SFP25G-LRXXXX

Features

- Operating data rate up to 25.78Gbps
- Up to 10km (PIN) transmission distance directly
- CWDM EML Laser and PIN receiver
- LC duplex connector
- Hot pluggable 20pin connector
- Low power consumption <2W
- Single +3.3V±5% power supply
- Compliant with SFF-8472
- Fully RoHS Compliant
- Operating temperature range: 0°C to +70°C

Applications

- 25G Ethernet
- CPRI Option 10

Product description

The Transceiver is intended for 10km (PIN) reach service from 24.33Gb/s to 25.78Gb/s CWDM C27-C61 single mode high-speed communications equipment where low-cost, extraordinary performance and reliability are essential. It consumes low power, operates base on 3.3V DC power supply and is offered in the industrial temperature range. They are compliant with SFP28 MSA, SFF-8431 and SFF-8432. The low jitter and low bit error rate optical assembly features a C27-C61 EML laser transmitter and PIN receiver. It utilizes internal clock and data recovery (CDR) units on transmitter and the receiver chains for low jitter compliance. The differential AC coupled Tx and Rx data interfaces are CML compatible. The device is Class I laser safety compliant.

1. Absolute Maximum Ratings

| Parameter | Symbol | Unit | Min | Max |
|---------------------------|--------|------|-----|-----|
| Storage Temperature Range | Ts | oC | -40 | 85 |
| Relative Humidity | RH | % | 0 | 95 |

2. Recommended Operating Conditions

| Parameter | Symbol | Unit | Min | Type | Max |
|----------------------------------|--------|------|------|-------|--------|
| Operating Case Temperature Range | Tc | oC | 0 | | 70 |
| Power Supply Voltage | Vcc | V | 3.14 | 3.3 | 3.46 |
| Bit Rate | BR | Gb/s | | 25.78 | |
| Bit Error Ratio | BER | | | | 5*10-5 |
| Max Supported Link Length | L | Km | | | 10 |

3. Electric Ports Definition

| Parameter | Symbol | Unit | Min | Type | Max | Note |
|----------------------------------|---------|----------|-----|------|---------|------|
| Transmitter | | | | | | |
| Input Differential Impedance | RIN | Ω | | 100 | | |
| Single-ended Data Input Swing | VIN | mVp-p | 90 | | 450 | |
| Transmit Disable Voltage | VDIS | V | 2 | | VCCHOST | |
| Transmit Enable Voltage | VEN | V | VEE | | VEE+0.8 | |
| Transmit Fault Assert Voltage | VFA | V | 2 | | VCCHOST | |
| Transmit Fault De-Assert Voltage | VFDA | V | VEE | | VEE+0.4 | |
| Receiver | | | | | | |
| Single-ended Data Output Swing | VOD | mVp-p | 200 | | 450 | |
| LOS Fault | VLOSFT | V | 2 | | VCCHOST | |
| LOS Normal | VLOS NR | V | VEE | | VEE+0.4 | |

4. Optical Characteristics (T_a and V_{cc} = 3.14 to 3.46V)

| Parameter | Symbol | Unit | Min | Type | Max | Note |
|---|-----------------|-------|--|------|-------|------|
| Transmitter | | | | | | |
| Nominal Wavelength | λ_C | nm | 1270, 1290, 1310, 1330, 1350, 1370, 1390, 1410, 1430, 1450, 1470, 1490, 1510, 1530, 1550, 1570, 1590, 1610 | | | |
| Wavelength Drift | $\Delta\lambda$ | nm | -6.5 | | +6.5 | |
| Average Output Power | P_{av} | dBm | -2 | | 5 | |
| Spectral Width (-20dB) | σ | nm | | | 1 | |
| Extinction Ratio | ER | dB | 6 | | | |
| Side Mode Suppression Ratio | SMSR | dB | 30 | | | |
| Average Launch Power of OFF Transmitter | POFF | dBm | | | -30 | |
| Relative Intensity Noise | RIN | dB/Hz | | | -128 | |
| Receiver (APD/TIA) | | | | | | |
| Center Wavelength | λ_C | nm | 1260 | | 1620 | |
| Receiver Sensitivity | RSENSE | dBm | | | -14.5 | 1 |
| Receiver Overload (OMA) | P_{max} | dBm | 2 | | | |
| Optical Return Loss | | dB | | | -26 | |
| LOS Assert | LOSA | dBm | -30 | | | |
| LOS De-Assert LOS | LOSD | dBm | | | -17 | |
| LOS Hysteresis | | dB | 0.5 | | | |

Note1: Measured at 25.78125Gb/s, C27~C61, LR>=4dBm, PRBS 2³¹-1 and BER better than or equal to 5E-5

5. PIN Assignment

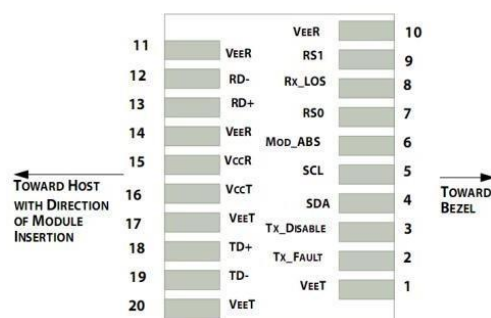


Figure 1. Pin function definitions

Transceiver pin descriptions

| Pin | Symbol | Name | Description |
|----------|------------|---|---|
| 1,17,20 | VeeT | Transmitter Signal Ground | Connected to signal ground on the host board. |
| 2 | TX Fault | Transmitter Fault Out (OC) | Module transmitter fault output. |
| 3 | TX Disable | Transmitter Disable In (LVTTL) | Module transmitter disable control. |
| 4 | SDA | Module Definition Identifiers | Serial ID with SFF 8472 Diagnostics Module Definition pins should be pulled up to Host Vcc with 10 kΩ resistors. |
| 5 | SCL | | |
| 6 | MOD-ABS | | |
| 7 | RS0 | Receiver Rate Select (LVTTL) Transmitter Rate Select (LVTTL) | Rate select 0(Rx):Low=CDR Bypass ; High=CDR Select Rate select 1(Tx):Low=CDR Bypass; High=CDR Select |
| 9 | RS1 | | |
| 8 | LOS | Loss of Signal Out (OC) | Receiver loss of signal. |
| 10,11,14 | VeeR | Receiver Signal Ground | Connected to signal ground on the host board. |
| 12 | RD- | Receiver Negative DATA Out (CML) | Receiver inverted data output, internally AC coupled and terminated |
| 13 | RD+ | Receiver Positive DATA Out (CML) | Receiver non-inverted data output, internally AC coupled and terminated. |
| 15 | VccR | Receiver Power Supply | Receiver Power 3.3V Supply. |
| 16 | VccT | Transmitter Power Supply | Transmitter Power 3.3V Supply. |

| | | | |
|----|-----|------------------------------------|--|
| 18 | TD+ | Transmitter Positive DATA In (CML) | Transmitter non-inverted data input, internally AC coupled and terminated. |
| 19 | TD- | Transmitter Negative DATA In (CML) | Transmitter inverted data Input, internally AC coupled and terminated. |

6. Recommended Interface Circuit


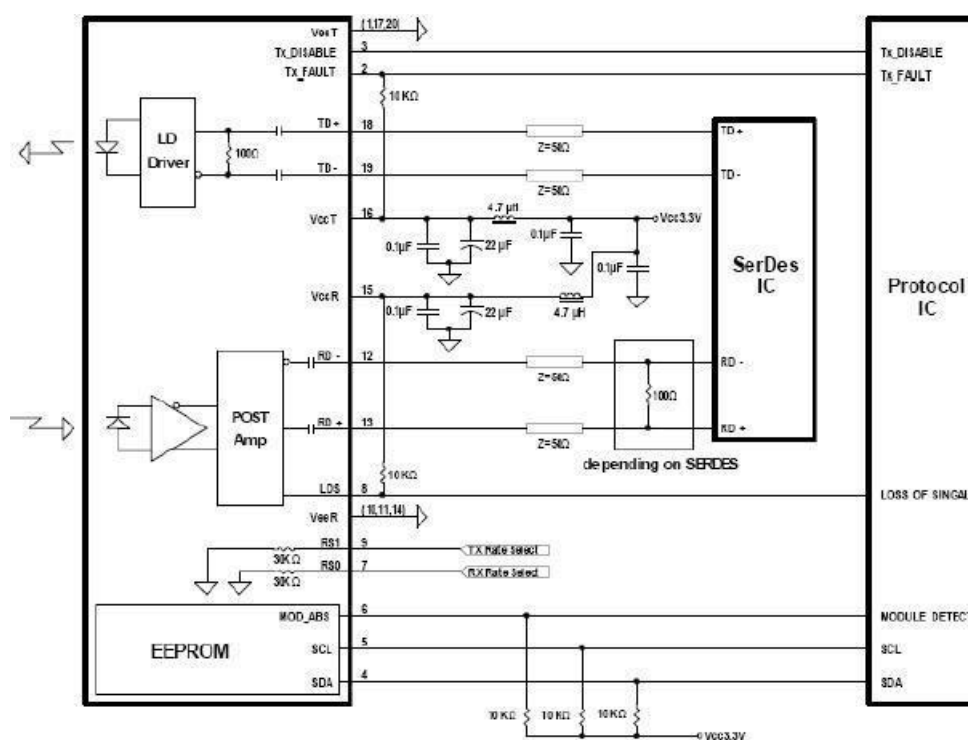


Figure 2. Typical application circuit

7. Mechanical Dimensions

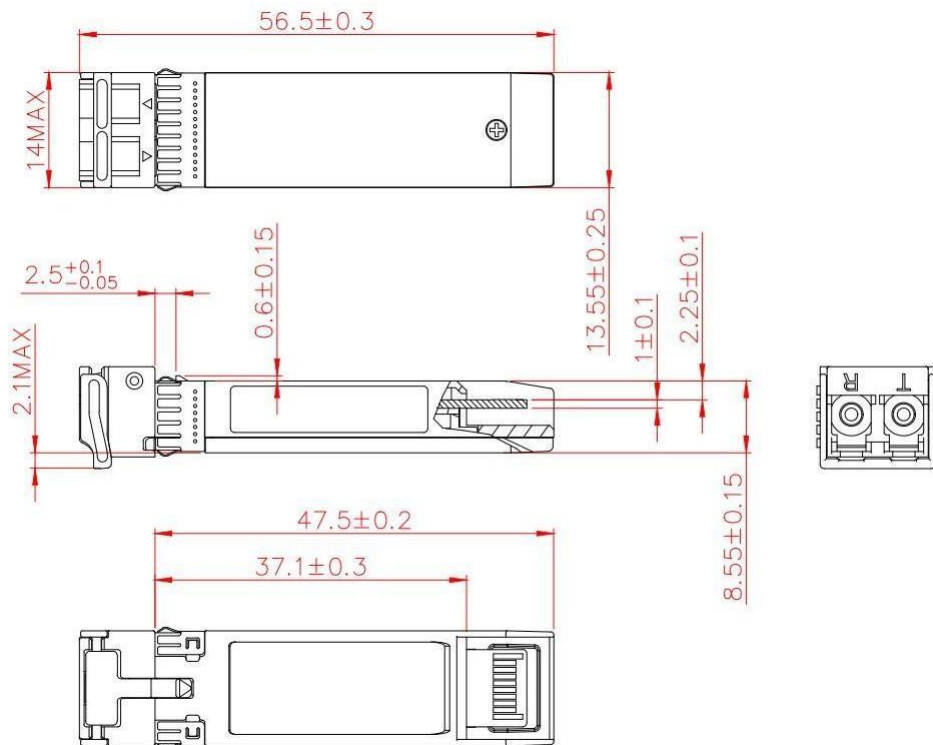

8. Digital Diagnostics Functions

As defined by the SFF-8472, our SFP28 transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameter:

- Transceiver temperature
- Laser bias current
- Transmitted optical power
- Received optical power
- Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range. The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8-bit parameters, addressed from 0x00h to the maximum address of the memory. For more detailed information, including memory map definitions, please refer to the SFF-8472 documentation.

9. Digital Diagnostic Monitor Accuracy

The following characteristics are defined over recommended operating conditions

| Parameter | Accuracy | Unit |
|--|----------|-------|
| Internally measured transceiver temperature | +/-3 | deg.C |
| Internally measured transceiver supply voltage | +/-3 | % |
| Measured Tx bias current | +/-10 | % |
| Measured Tx output power | +/-3 | dB |
| Measured Rx received average optical power | +/-3 | dB |

MTNetworks

10. Ordering information

| Part Number | Product Description |
|------------------|-------------------------|
| MT-SFP25G-LR1270 | 25G SFP28 1270 10km APD |
| MT-SFP25G-LR1290 | 25G SFP28 1290 10km APD |
| MT-SFP25G-LR1310 | 25G SFP28 1310 10km APD |
| MT-SFP25G-LR1330 | 25G SFP28 1330 10km APD |
| MT-SFP25G-LR1350 | 25G SFP28 1350 10km APD |
| MT-SFP25G-LR1370 | 25G SFP28 1370 10km APD |
| MT-SFP25G-LR1390 | 25G SFP28 1390 10km APD |
| MT-SFP25G-LR1410 | 25G SFP28 1410 10km APD |
| MT-SFP25G-LR1430 | 25G SFP28 1430 10km APD |
| MT-SFP25G-LR1450 | 25G SFP28 1450 10km APD |
| MT-SFP25G-LR1470 | 25G SFP28 1470 10km APD |
| MT-SFP25G-LR1490 | 25G SFP28 1490 10km APD |
| MT-SFP25G-LR1510 | 25G SFP28 1510 10km APD |
| MT-SFP25G-LR1530 | 25G SFP28 1530 10km APD |
| MT-SFP25G-LR1550 | 25G SFP28 1550 10km APD |
| MT-SFP25G-LR1570 | 25G SFP28 1570 10km APD |
| MT-SFP25G-LR1590 | 25G SFP28 1590 10km APD |
| MT-SFP25G-LR1610 | 25G SFP28 1610 10km APD |

11. For More Information

Mitra Telco Utama
MTNetworks Division
info@mitratelco.com
www.mitratelco.com